

G3VM-63BR/63ER

MOS FET Relays DIP 6-pin, High Current and Low ON-Resistance Type

MOS FET Relays in DIP 6-pin Packages with SPST-NC Contacts That Achieve Low ON-Resistance and High Switching Capacity of a Mechanical Relay

Contact form: 1bLoad voltage: 60 V

• Continuous load current (peak value): 1.2 A (2.4 A) *

*Values in parentheses are for connection C.



Note: The actual product is marked differently from the image shown here.

Application Examples

- Industrial equipment (PLC, Temperature controller, Power supply, etc.)
- Security equipment
- Test & measurement equipment
- Communication equipment

Package (Unit:

DIP 6-pinPCB Terminals

(Unit : mm, average)

Model Number Legend

__ <u>__</u> __ <u>__</u> __ <u>__</u> 1 2 3 4

1. Load voltage 6:60 V

2. Contact form 3: 1b (SPST-NC)

3. Package

B : DIP 6-pin with PCB terminals E : DIP 6-pin with surface-mounting terminals

Surface-mounting Terminals



Note: The actual product is marked differently from the image shown here.

4. Additional functionsR: Low ON resistance

Ordering Information

		Load voltage (peak value) *	Continuous load current (peak value) *		Stick packaging			Tape packaging	
Package	Contact form				Model		Minimum	Model	Minimum
			Connection A, B	Connection C	PCB terminals	Surface-mounting terminals	package quantity	Surface-mounting terminals	package quantity
DIP6	1b	60 V	1.2 A	2.4 A	G3VM-63BR	G3VM-63ER	50 pcs.	G3VM-63ER(TR05)	500 pcs.

^{*}The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for relays with surface-mounting terminals, add "(TR05)" to the end of the model number.


G3VM-63BR/63ER

Absolute Maximum Ratings (Ta = 25°C)

ltem			Symbol	G3VM-63BR G3VM-63ER	Unit	Measurement conditions
LED forward current LED forward current reduction rate LED reverse voltage Junction temperature			lF	20	mA	
			ΔI _F /°C	-0.3	mA/°C	Ta ≥ 58°C
			VR	6	V	
			TJ	125	°C	
Load voltage (AC peak/DC)		Voff	60	V		
Output	Continuous load current	Connection A	lo	1.2	A	Connection A: AC peak/DC Connection B and C: DC
		Connection B				
		Connection C		2.4		
	ON current reduction rate	Connection A	Δlo/°C	-12	mA/°C	Ta ≥ 25°C
		Connection B				
		Connection C		-24		
	Pulse ON current	1	lop	3	Α	t=100 ms, Duty=1/10
Junction temperature			TJ	125	°C	
Dielectric strength between I/O *			V _{I-O}	5,000	Vrms	AC for 1 min
Ambient operating temperature			Та	-40 to +110	°C	With no icing or
Ambient storage temperature			Tstg	-55 to +125	°C	condensation
Soldering temperature			_	260	°C	10 s

^{*}The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram



Electrical Characteristics (Ta = 25°C)

Item			Symbol		G3VM-63BR G3VM-63ER	Unit	Measurement conditions	
			VF	Minimum	1.1		I _F =10 mA	
LED forward voltage				Typical	1.27	V		
				Maximum	1.4	1		
Input	Reverse current		lR	Maximum	10	μА	V _R =6 V	
ᆸ	Capacitance between terminals		Ст	Typical	70	pF	V=0 V, f=1 MHz	
Triangue I ED forward assess			1	Typical	0.3	mA	1 10 1	
	Trigger LED forward current		IFC	Maximum	2		Ioff=10 μA	
	Release LED forward c	elease LED forward current		Minimum	0.01	mA	Io=1.2 A	
		Connection A	Ron	Typical	0.3		lo=1.2 A	
	Maximum resistance with output ON			Maximum	0.6	Ω		
		Connection B		Typical	0.2			
		Connection C		Typical	0.1		Io=2.4 A	
ō	Current leakens when t	O		Maximum	10	μА	Voff=60 V, If=5 mA	
	Current leakage when the relay is open		ILEAK		1		Voff=40 V, If=2 mA	
	Capacitance between terminals		Coff	Typical	550	pF	V=0 V, f=1 MHz, I _F =5 mA	
Capacitance between I/O terminals			CI-O	Typical	0.9	pF	Vs=0 V, f=1 MHz	
Inculation registeres between I/O town-in-I-			Ri-o	Minimum	1,000	ΜΩ	V⊦o=500 VDC, RoH ≤ 60%	
Insulation resistance between I/O terminals		Typical		10 ⁸	IVISZ			
Turn ON time		ton	Typical	0.3				
Turn-ON time			Maximum	2	ms	L = 5 = A D = 200 O V = 20 V #		
Turn-OFF time			toff	Typical		2	I _F =5 mA, R _L =200 Ω , V _{DD} =20 V *	
				Maximum		3		

^{*}Turn-ON and Turn-OFF times



Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions are measures that take into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so they do not simultaneously satisfy several conditions.

Item	Symbol		G3VM-63BR G3VM-63ER	Unit	
Load voltage (AC peak/DC)	V _{DD}	Maximum	48	V	
Operating LED forward current	le.	Typical	5	mA	
Operating LED forward current	lF	Maximum	10	ША	
Continuous load current (AC peak/DC)	lo	Maximum	1.2	А	
Ambient energting temperature	Та	Minimum	-20	°C	
Ambient operating temperature	та	Maximum	85	<u> </u>	


Spacing and Insulation

Item	Minimum	Unit
Creepage distance	7.0	
Clearance distance	7.0	mm
Internal isolation thickness	0.3	11111


G3VM-63BR/63ER

Engineering Data


LED forward current vs. Ambient temperature




Continuous load current vs. On-state voltage




Turn ON, Turn OFF time vs. LED forward current




Current leakage vs. Load voltage




LED forward current vs. LED forward voltage




On-state resistance vs. Ambient temperature




Turn ON, Turn OFF time vs. Ambient temperature




Current leakage vs. LED forward current




Continuous load current vs. Ambient temperature



Trigger LED forward current vs. Ambient temperature



Current leakage vs. Ambient temperature



Note: About the "Current leakage vs. LED forward current" graph:


Take note that the current leakage is affected by the LED forward current input due to the internal mechanism of this model.


Appearance / Terminal Arrangement / Internal Connections

Appearance

Terminal Arrangement/Internal Connections (Top View)

DIP (Dual Inline Package)






- Note: 1. The actual product is marked differently from the image shown here. Note: 2. "G3VM" does not appear in the model number on the relay.
- Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

Dimensions

CAD Data marked products, 2D drawings and 3D CAD models are available. For CAD information, please visit our website, which is noted on the last page.

(Unit: mm)

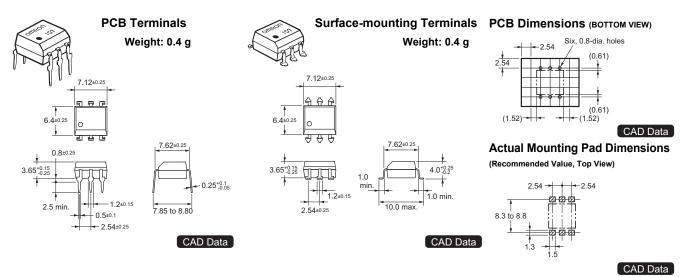

Note: The actual product is marked differently from the image shown here.

Safety Precautions

• Refer to the Common Precautions for All MOS FET Relays for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation Device & Module Solutions Company

Regional Contact

Americas

https://components.omron.com/us

Asia-Pacific

https://components.omron.com/ap

Korea

https://components.omron.com/kr

Europe

https://components.omron.com/eu

China

https://components.omron.com.cn

Japan

https://components.omron.com/jp