


Number of contacts

# 96, 64, 32

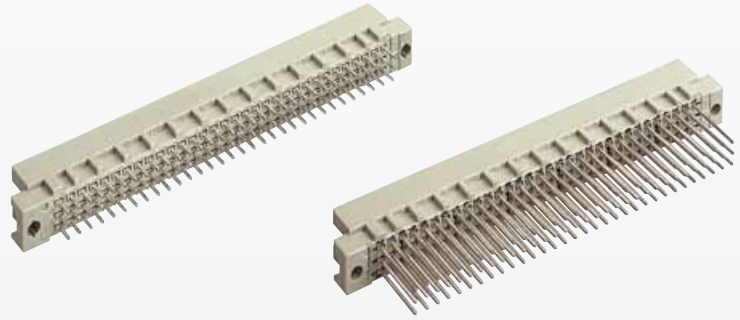

## Male connectors


DIN Signal to 2 A

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to IEC 60 603-2. Explanation chapter 00		
				3	2	1
Male connector with solder pins 2.5 mm	96		09 73 196 7902	09 73 196 6902	09 73 196 2902	
	94 + 2 <sup>▲</sup>		09 73 196 7952	09 73 396 6902 <sup>b)</sup>	09 73 196 2952	
	64		09 73 164 7902	09 73 164 6902	09 73 164 2902	
	32		09 73 132 7902	09 73 364 6902 <sup>b)</sup>	09 73 364 2902 <sup>b)</sup>	
Male connector with solder pins 4.0 mm	96		09 73 196 7903	09 73 196 6903	09 73 196 2903	
	94 + 2 <sup>▲</sup>		09 73 196 7953	09 73 396 6903 <sup>b)</sup>	09 73 196 2953	
	64		09 73 164 7903	09 73 164 6903	09 73 164 2903	
	32		09 73 132 7903	09 73 364 6903 <sup>b)</sup>	09 73 132 2903	
Male connector with wrap posts 13 mm	96		09 73 196 7907	09 73 196 6907	09 73 196 2907	
	94 + 2 <sup>▲</sup>		09 73 196 7957	09 73 196 6957	09 73 196 2957	
	64		09 73 164 7907	09 73 164 6907	09 73 164 2907	
	32		09 73 132 7907	09 73 132 6907	09 73 132 2907	

## Male connector with press-in pins

Part Nos. and variants see chapter 04

## Dimensions

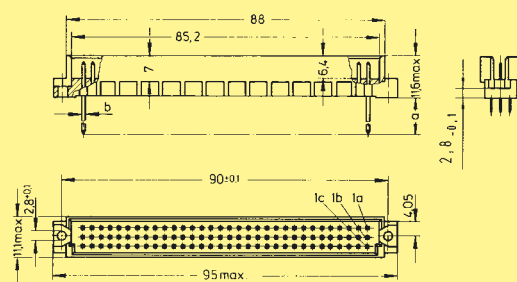


a	b
2.5	∅ 0.7
4	

Solder pins

a	b
13	∅ 0.6

Wrap posts



## Panel cut out

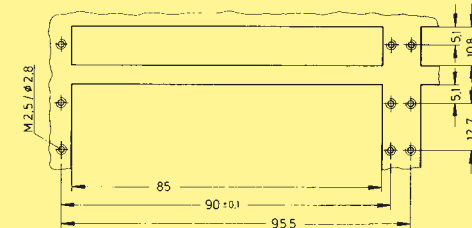

Contact arrangement View from termination side

## Board drillings

Mounting side

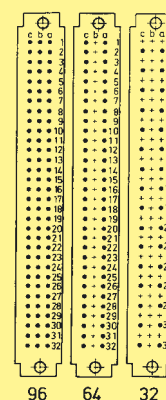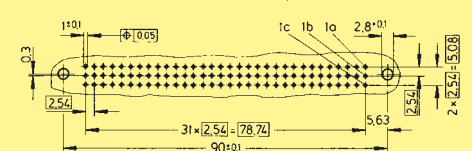

Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a32]  
 Other contact arrangements as well with lagging pins on request  
 b) Connectors with snap-in clips see chapter 00