

# **SPECIFICATION SHEET**

SPECIFICATION SHEET NO.	R0512- SS2200A000S200		
DATE	May 12, 2024		
REVISION	A2 Updated With Most Recent Data		
DESCRIPTION AND	SMD Schottky Barrier Rectifier 2 Pads, Case DO-214AC/SMA SS2 Series, Repetitive Peak Reverse Voltage 200V Max.		
MAIN PARAMETRICS	Average Forward Rectified Current 2.0A Max.  Operating Junction Temp. Range -55°C ~+150°C		
	Package in Tape/Reel, 5000pcs/Reel		
	RoHS III/REACH Compliant and Halogen Free (HF)		
CUSTOMER			
CUSTOMER PART NO.			
CROSS REF. PART NO.			
ORIGINAL MFG/PART NO.	MDD Diodes/SS2200A		
PART CODE	SS2200A000S200		

### **VENDOR APPROVE**

Issued/Checked/Approved







DATE: May 12, 2024

CUSTOMER APPROVE	
DATE:	



## SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA

#### **MAIN FEATURE**

- The Plastic Package Carries Underwriters Laboratory Flammability Classification 94V-0
- Low Power Loss and High Efficiency
- Metal Silicon Junction and Majority Carrier Conduction
- Built-in Strain Relief and Ideal For Automated Placement
- High Forward Surge Current Capability
- High Temperature Soldering Guaranteed: 250°C/10 Seconds At Terminals
- Surface Mount Package Ideally Suited for Automatic Insertion
- REACH/RoHS III Complaint and Halogen Free
- Cross Main Competitor Parts in Market

#### **APPLICATION**

For SMD application

#### **ELECTRICAL CHARACTERISTICS**

• See Page 5~ Page 6 For Different Part Code









# **SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA**

#### **HOW TO ORDER**

• Please Follow Up Part Code Guide And Indicate Pat Code When You Order Or RFQ For Custom Specification .

#### **PART CODE GUIDE**



CODE	NAME	KEY SPECIFICATION OPTION
SS2	Product Series Code	SMD Schottky Barrier Rectifier, Forward Current 2.0A
200	Repetitive Peak Reverse Voltage Code	2: 20V Max.; 3: 30V Max.; 4: 40V Max.; 5: 50V Max.; 6: 60V Max.; 8: 80V Max.; 10: 100V Max.; 150: 150V Max.; 200: 200V Max
AO	Case Code	A0: Case DO-214AC/SMA; B0: Case DO-214AA/SMB; BF: Case SMBF; C0: Case SMC/DO-214AB; F0: Case SMAF; W0: Case SMF/SOD-123FL
00S	Internal Control Code	Custom letter A~Z, a-z or Digits (0-9)
200	DC Blocking Voltage Code	020: 20V Max.; 030: 30V Max.; 040: 40V Max.; 050: 50V Max.; 060: 60V Max.; 080: 80V Max.; 100: 100V Max.; 150: 150V Max.; 200: 200V Max

0.110(2.80)

# SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA


**DIMENSION** (Unit: Inch/mm)

### Image for reference




#### Marking:

See Page -6 Marking List For different Part code




SMA/DO-214AC

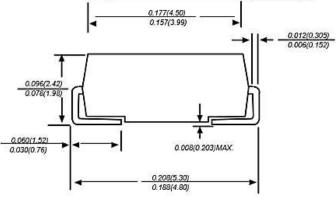



#### **Recommend Pad Layout**



Symbol	Unit (Inch)	Unit (mm)
	, ,	, ,
А	0.066	1.680
В	0.060	1.520
С	0.154	3.900
D	0.095	2.410
E	0.215	5.450



# **SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA**

#### **MECHANICAL DATA**

CASE	TERMINALS	POLARITY	MOUNTING POSITION	WEIGHT PER PIECE
JEDEC DO-214AC/SMA Molded Plastic Body	Solder plated, Solderable per MIL-STD-750, Method 2026	Polarity Symbol Marking On Case	Any	0.0020 Ounce, 0.0700 Grams

#### **MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER		SYMBOLS	VALUE	UNITS
Maximum Average Forward F	I AV	2.0	А	
Peak Forward Surge Current Sine-wave Superimposed On (JEDEC Method)	l fsm	50	А	
Typical Thermal Resistance (Note 2)		R øja	80	°C/W
Operating Junction	@ V RRM 20V ~50V	ΤJ	-55 to +125	°C
Temperature Range @ V RRM 60V ~200V		ΤJ	-55 to +150	°C
Storage Temperature Range		T stg	-55 to +150	°C

#### Note:

- 1. Measured at 1MHz And Applied Reverse Voltage Of 4.0V D.C
- 2. P.C.B. Mounted With 0.2"x0.2"(5.08 x 5.08 mm) Copper Pad Areas



## SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS FOR DIFFERENT PART CODE

Ratings At 25 °C Ambient Temperature Unless Otherwise Specified. Single Phase Half-wave 60hz, resistive Or Inductive Load, For Capacitive Load Current Derate By 20%.

PART CODE	Max.	Max.	Max.	Max.	Maxir	num	Typical	Marking
	Repetitive	RMS	DC	Inst.	DC Reverse		Junction	List
	Peak	Voltage	Blocking	Forward	Curr	ent	Cap.	
	Reverse		Voltage	Voltage	At Ra	ited	(Note 1)	
	Voltage			@	D	С		
				2.0A	Block	king		
					Volta	age		
					@	@		
					25	100		
					°C	°C		
	V RRM	V RMS	V DC	VF	L	R	Сı	
	V	V	V	V	m	4	pF	
SS22A00000S020	20	14	20	0.55	0.5	5	220	SS22
SS23A00000S030	30	21	30	0.55	0.5	5	220	SS23
SS24A00000S040	40	28	40	0.55	0.5	5	220	SS24
SS25A00000S050	50	35	50	0.70	0.5	5	80	SS25
SS26A00000S060	60	42	60	0.70	0.5	5	80	SS26
SS28A00000S080	80	56	80	0.85	0.3	3	80	SS28
SS210A0000S100	100	70	100	0.85	0.3	3	80	SS210
SS2150A000S150	150	105	150	0.95	0.3	3	80	SS2150
SS2200A000S200	200	140	200	0.95	0.3	3	80	SS2200

#### Note:

- 1. Measured at 1MHz And Applied Reverse Voltage Of 4.0V D.C
- 2. P.C.B. mounted with 0.20"x0.20"(5.08 x 5.08 mm) Copper Pad Areas

6



## SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA

## RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

Fig.1 Forward Current Derating Curve



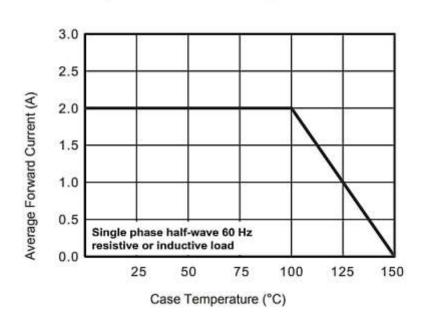


Fig.2 Typical Reverse Characteristics

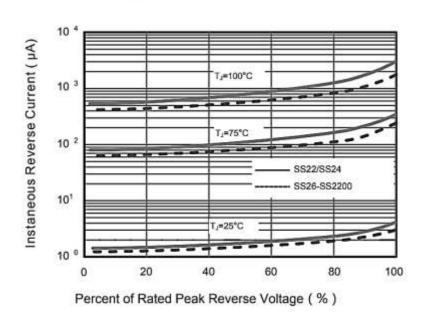

5/12/2024 7



# SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA

### RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

Fig.3 Typical Forward Characteristic


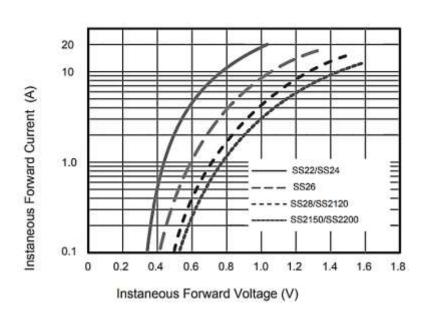


Fig.4 Typical Junction Capacitance



5/12/2024 8

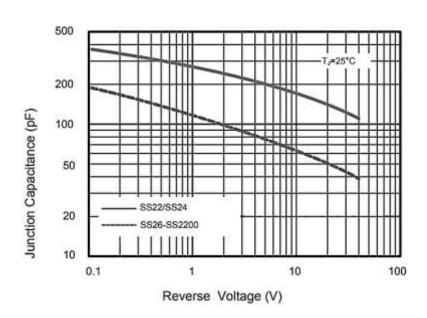

# SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA

## RATINGS AND CHARACTERISTIC CURVES (For Reference Only)


Fig.5 Maximum Non-Repetitive Peak
Forward Surage Current

60
40
40
40
40
40
40
40
10
8.3 ms Single Half Sine Wave (JEDEC Method)

1 10 100

Number of Cycles at 60Hz

Fig.6- Typical Transient Thermal Impedance

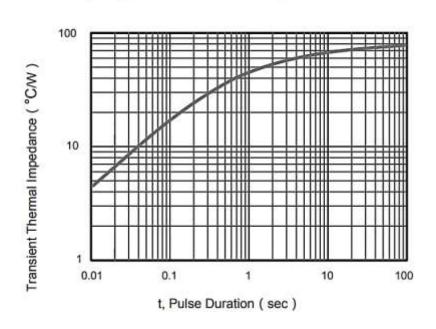




# **SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA**

### **RELIABILITY**

NUMBER	EXPERIMENT ITEMS	EXPERIMENT METHOD AND CONDITIONS	REFERENCE DOCUMENTS
1	Solder Resistance Test	Test 260°C± 5°C for 10 ± 2 sec. Immerse body into solder 1/16" ± 1/32"	MIL-STD-750D METHOD-2031.2
2	Solderability Test	230°C ±5°C for 5 sec.	MIL-STD-750D METHOD-2026.1 0
3	Pull Test	1 kg in axial lead direction for 10 sec.	MIL-STD-750D METHOD-2036.4
4	Bend Test	0.5Kg Weight Applied To Each Lead, Bending Arcs 90 °C ± 5 °C For 3 Times	MIL-STD-750D METHOD-2036.4
5	High Temperature Reverse Bias Test	TA=100°C for 1000 Hours at VR=80% Rated VR	MIL-STD-750D METHOD-1038.4
6	Forward Operation Life Test	TA=25°C Rated Average Rectified Current	MIL-STD-750D METHOD-1027.3
7	Intermittent Operation Life Test	On state: 5 min with rated IRMS Power Off state: 5 min with Cool Forced Air. On and off for 1000 cycles.	MIL-STD-750D METHOD-1036.3
8	Pressure Cooker Test	15 PSIG, TA=121°C, 4 hours	MIL-S-19500 APPENOIXC
9	Temperature Cycling Test	-55°C~+125°C; 30 Minutes For Dwelled Time 5 minutes for transferred time. Total: 10 cycles.	MIL-STD-750D METHOD-1051.7
10	Thermal Shock Test	0°C for 5 minutes., 100°C for 5minutes, Total: 10 cycles	MIL-STD-750D METHOD-1056.7
11	Forward Surge Test	8.3ms Single Sale Sine-wave One Surge.	MIL-STD-750D METHOD-4066.4
12	Humidity Test	Ta=65°C, RH=98% for 1000 hours.	MIL-STD-750D METHOD-1021.3
13	High Temperature Storage life Test	150°C for 1000 Hours	MIL-STD-750D METHOD-1031.5

# SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA

## SUGGESTED REFLOW PROFILE - For Reference Only

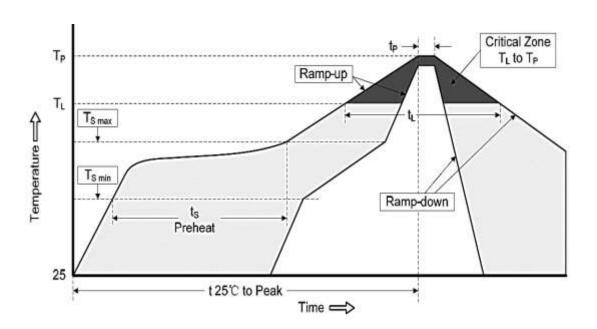

PROFILE FEATURE		PB-FREE ASSEMBLY
Average Ramp-up Rate (Ts Max to Tp)		3°C/second Max
Preheat Temperature Min (Ts Min.)		150℃
	Temperature Max (Ts Max.)	200°C
	Time (ts Min. to ts Max.)	60 ~ 180 seconds
Time maintained above	Temperature (TL)	217°C
	Time (tL)	60 ~ 150 seconds
Peak/Classification <sup>-</sup>	Temperature (Tp)	260 °C
Time within 5°C of actual Peak Temperature (tp)		20 ~ 40 seconds
Ramp-down rate		6 °C /Second Max.
Time 25 °C to Peak Temperature		8 minutes Max.
Suggest reflow times		3 Times Max.


5/12/2024 11

PART CODE: **SS2200A000S200** 


# SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA

## TAPE/REEL (Unit: mm)

All Devices are packed in accordance with EIA standard RS-481-A and specifications.

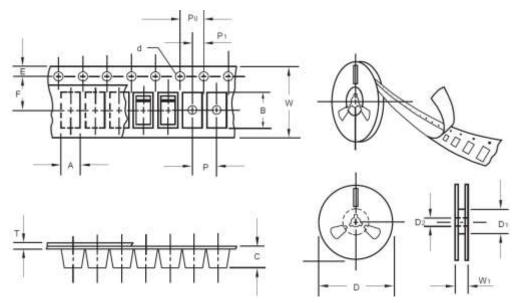

ITEM	SYMBOL	TOLERANCE	SMA/DO-214AC
Carrier width	А	0.1	2.8
Carrier Length	В	0.1	5.33
Carrier Depth	С	0.1	2.36
Sprocket hole	d	0.05	1.50
13" Reel outside diameter	D	2.0	330.00
13" Reel inner diameter	D1	Min.	50.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	5.50
Punch hole pitch	Р	0.1	4.00
Sprocket hole pitch	Р0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	Т	0.1	0.28
Tape width	W	0.3	12.00
Reel width	W1	1.0	18.0
MPQ/Reel	5000pcs/Reel		•



# SMD SCHOTTKY BARRIER RECTIFIER SS2 SERIES CASE SMA

#### IMPORTANT NOTES AND DISCLAIMER

- ROHS COMPLIANCE: The levels of RoHS restricted materials in this product are below the maximum
  concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an
  exempted application, in accordance with EU RoHS Directive (EU) 2015/863 EC (RoHS3). RoHS Test Report for
  this product can be obtained can be obtained at Download Center.
- REACH COMPLIANCE: REACH substances of high concern (SVHCs) information is available for this product.
   Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, REACH Test Report for this product can be obtained can be obtained at Download Center.
- 3. All Product parametric performance is indicated in the Electrical Characteristics for the listed herein test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
- 4. NextGen Component, Inc (*NextGen*) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- 5. NextGen makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does NextGen assume any liability for application assistance or customer product design.
- 6. NextGen does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application. No license is granted by implication or otherwise under any intellectual property rights of NextGen.
- NextGen products are not authorized for use as critical components in life support devices or systems without
  express written approval by NextGen.
- 8. NextGen requires that customers first obtain an RMA (Returned Merchandise Authorization) number prior to returning any products. Returns must be made within 30 days of the date of invoice, be in the original packaging, unused and like-new condition. At the time of quoting or purchasing, a product may say that it is

Non-Cancelable/ Non-Returnable (NCNR). These products are not returnable and not refundable. 5/12/2024