


Thick Film Chip Resistors

MCR Series < Automotive >

Features


- 1) Full line up from ultra small size (01005) to 2512 with jumper type.
- 2) High reliability metal glazed thick film.
- 3) ROHM resistors have obtained ISO9001/ISO/TS16949 certification.
- 4) "Automotive" product is AEC-Q200 compliant.



	Si	ze	Туре	Code		
Part No.	(mm)	(inch)	GENERAL PURPOSE	AUTOMOTIVE *Corresponds to AEC-Q200	Packing Specification	Quantity / Reel
MCR004	0402	01005	YZP	_	Paper tape (2mm pitch)	15,000
WICK004	0402	01003	RZP	_	Embossed tape (1mm pitch)	40,000
MCR006	0603	0201	YRT	YZP	Paper tape	15,000
	4005	0.400	MRT	MZP	(2mm pitch)	10,000
MCR01	1005	0402	PZPI (*For further information on datasheet, please refer to AUTOMOTIVE datasheet.)		Bulk case	50,000
	4000	0000	ERT	EZP	Paper tape (4mm pitch)	5,000
MCR03	1608	0603	MZP / (*For further inform: please refer to AUTC		MZP : Paper tape (2mm pitch) PZPI : Bulk case	MZP : 10,000 PZPI : 25,000
MCR10	2012	0805	ERT	EZP	Paper tape	5,000
MCR18	3216	1206	ERT	EZP	(4mm pitch)	5,000
MCR25	3225	1210	JZ	ZH		
MCR50	5025	2010	JZ	ZH Embossed tape (4mm pitch)		4,000
MCR100	6432	2512	JZ	ΊΗ		

^{*}Please contact us for status of AEC-Q200 on "General purpose" products.

Part Number Description

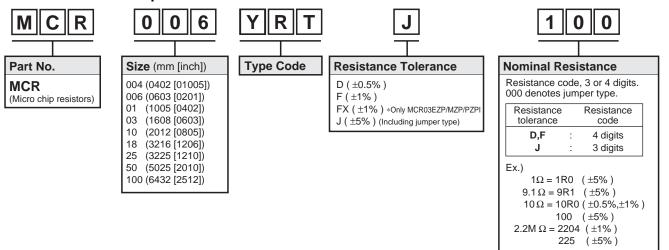

1/6


●Products List

Part No.	Type Code	Rated Power (70°C)	Limiting Element Voltage	Maximum Overload Voltage	Temperature Coefficient	Resistance Tolerance	Resistance Range	Series	Operating Temperature Range
		(W)	(V)	(V)	(ppm / °C)	(%)			(°C)
					+600 / -200	J(±5%)	1.0Ω to 9.1Ω		
					±250	J(±3 /6)	10 Ω to 10M Ω		
MCR006	MCR006 YZP	0.05	25	_	±250	F(±1%)	10Ω to 10MΩ	E24	-55 to +125
Morkooo	121				±200	D(±0.5%)	10Ω to 910Ω		
					±100		1kΩ to 1MΩ		
			•	Jumper type	: Rmax = 50n	$\Omega / \text{Imax.} =$			
					+500 / -250	J(±5%)	1.0Ω to 9.1Ω	E24	
	1470	0.000	50		±200		10Ω to 10MΩ	F04 F00	
MCR01	MZP PZPI	0.063	50	_	±100 ±100	F(±1%)	10Ω to 2.2MΩ 10Ω to 91Ω	E24,E96	
	FZFI				±100 ±50	D(±0.5%)	100Ω to 1MΩ	E24	
				lumper type	: Rmax = 50	m O / Imax =			
				Jumper type	± 400	11152 / 1111ax. =	1.0Ω to 9.1Ω		
					±200	J(±5%)	1.002 to 9.102 $10\Omega \text{ to } 10\text{M}\Omega$	E24	
	EZP	0.1	50	100	±100	FX(±1%)	10Ω to 10MΩ		
MCR03	MZP	0.1	00	100	±100	, ,	10Ω to 91Ω	E24,E96	
	PZPI				±50	D(±0.5%)	100 Ω to 1M Ω	,	
				Jumper type	: Rmax = 50	mΩ/Imax. =	: 1A		
				1 71	±400		1.0Ω to 9.1Ω	==-	
		0.125		200	±200	J(±5%)	10 Ω to 10M Ω	E24	
MODAO	E7D		150		±100	F(±1%)	10 Ω to 2.2M Ω		ļ
MCR10	EZP	0.1		300	±100	D(±0.5%)	10Ω to 91Ω	E24,E96	
		0.1			±50	. ,	100 Ω to 1M Ω		
				Jumper type	: Rmax = 50	$m\Omega/Imax. =$: 2A		-55 to +155
					±400	J(±5%)	1.0Ω to 9.1Ω	E24	00 10 1 100
		0.25			±200		10Ω to 10MΩ		
MCR18	EZP	EZP200	200	400	±100	F(±1%)	10Ω to 2.2MΩ	E04 E00	
		0.125			±100 ±50	D(±0.5%)	10 Ω to 91 Ω 100 Ω to 1M Ω	E24,E96	
				lumper type	: Rmax = 50	m O / Imax =			
				Jumper type		11132 / 1111ax. =			
					500±350	1/150/	1.0Ω to 2.0Ω	F0.4	
		0.25	200	400	±500	J(±5%)	2.2Ω to 5.1Ω	E24	
MCR25	JZH				±200		5.6Ω to 3.3 M Ω		
					±100	F(±1%)	10Ω to 1MΩ	E24,E96	
				Jumper type	: Rmax = 50	mΩ/Imax.=	2A		
					500±350		1.0Ω to 2.0Ω		
					±500	J(±5%)	2.2Ω to 9.1Ω	E24	
MCR50	JZH	0.5	200	400	±200	U(±U /U)	10Ω to 330 k Ω	LZ4	
	V-11				±350	E(+ 121)	360kΩ to 560kΩ	F04 F00	
					±100	F(±1%)	10Ω to 180kΩ	E24,E96	
				Jumper type	: Rmax = 50	$m\Omega / Imax. =$			
					500±350		1.0Ω to 2.0Ω		
		JZH 1 20	000	200 400	±500	J(±5%)	2.2Ω to 9.1Ω	E24	-55 to +125
MCR100	JZH		200		±350	0(±0/0)	10 Ω to 22 Ω 24 Ω to 100k Ω		
					±200 ±100	F(±1%)	24Ω to 100kΩ 10Ω to 82kΩ	E24,E96	
				lumper type	1	, ,		L27,L30	
	Jumper type : Rmax = $50m \Omega / Imax$. = $4A$								

^{*}Design and specifications are subject to change without notice. Carefully check the specification sheet supplied with the product before using or ordering it.

Chip Resistor Dimensions and Markings

■ MCR004 / 006 / 01 / 03 ■ MCR10 / 18 / 25 / 50 / 100



<Marking method>

There are three or four digits used for the calculation number according to IEC code and "R"is used for the decimal point.

(Unit : mm)

Part No.	Type Code	(mm)	(inch)	L	W	t	а	b	Marking existence
MCR006	YZP	0603	0201	0.6±0.03	0.3±0.03	0.23±0.03	0.1±0.05	0.15±0.05	No
MCR01	MZP PZPI	1005	0402	1.0±0.05	0.5±0.05	0.35±0.05	0.2±0.1	0.25 ^{+0.05} _{-0.1}	No
MCR03	EZP MZP PZPI	1608	0603	1.6±0.1	0.8±0.1	0.45±0.1	0.3±0.2	0.3±0.2	Yes *
MCR10	EZP	2012	0805	2.0±0.1	1.25±0.1	0.55±0.1	0.4±0.2	0.4±0.2	Yes
MCR18	EZP	3216	1206	3.2±0.15	1.6±0.15	0.55±0.1	0.5±0.25	0.5±0.25	Yes
MCR25	JZH	3225	1210	3.2±0.15	2.5±0.15	0.55±0.15	0.5±0.25	0.5±0.25	Yes
MCR50	JZH	5025	2010	5.0±0.15	2.5±0.15	0.55±0.15	0.6±0.25	0.6±0.25	Yes
MCR100	JZH	6432	2512	6.3±0.15	3.2±0.15	0.55±0.15	0.6±0.25	0.6±0.25	Yes

Marking method of jumper type

Jumper type	Marking existence
MCR006 / 01 / 25 / 50 / 100	No
MCR03 / 10 / 18	Yes

*Marking method of MCR03

For MCR03 series resistors, the printing process restricts the marking to three digits/characters.


Consequently, 1% tolerance resistors with values from the E24 series will be marked the same as

5% resistors with the same value, but 1% tolerance resistors with values from the E96 series will not be marked.

Examples:

MCR03EZPJ243	(5% tolerance, E24 / 24 k Ω)	Marking = 243
MCR03EZPFX2402	(1% tolerance, E24 / 24 k Ω)	Marking = 243
MCR03EZPFX2432	(1% tolerance, E96 / 24.3 k Ω)	No Marking
MCR18EZPJ243	(5% tolerance, E24 / 24 k Ω)	Marking = 243
MCR18EZPF2402	(1% tolerance, E24 / 24 k Ω)	Marking = 2402
MCR18EZPF2432	(1% tolerance, E96 / 24.3 k Ω)	Marking = 2432

•Land pattern Example

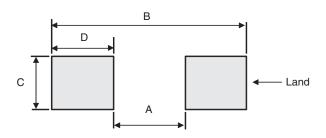


(Unit: mm) Dimensions С Type Code Α В D Part No. **MCR006** YZP 0.3 0.84 0.3 0.27 MZP MCR01 0.5 1.3 0.4 PZPI EZP MCR03 MZP 1.0 2.0 8.0 0.5 PZPI 2.6 MCR10 EZP 1.2 1.15 0.7 MCR18 EZP 2.2 4.0 1.5 0.9 MCR25 JZH 2.2 4.0 2.3 0.9 MCR50 JZH 6.0 2.3 3.8 1.1 MCR100 JZH 5.1 8.1 3.0 1.5


Derating Curve

■ MCR006 / 100

When the ambient temperature exceeds 70°C, power dissipation must be adjusted according to the derating curves below.







Characteristics

Test Items	Guarante	eed Value	Test Conditions		
Test Items	Resistor Type	Jumper Type	165t Conditions		
Resistance	See "Pro	ducts List"	20°C		
Variation of resistance with temperature	See "Pro	ducts List"	Measurement: +20 / -55 / +20 / +125°C		
Overload	± (2.0%+0.1Ω)	Max. 50mΩ	Rated voltage (current) ×2.5, 2s. Maximum overload voltage		
Solderability	A new uniform coating of minimum of 95% of the surface being immersed and no soldering damage.		Rosin-Ethanol : 25% (Weight) Soldering condition : 235±5°C Duration of immersion : 2.0±0.5s		
Resistance to soldering heat	\pm (1.0%+0.05Ω) No remarkable abnorm	Max. $50m\Omega$ ality on the appearance.	Soldering condition : 260±5°C Duration of immersion : 10±1s		
Rapid change of temperature	± (1.0%+0.05Ω)	Max. 50mΩ	Test temp55°C to +125°C 100cycle (MCR006 / 01 / 03) -55°C to +125°C 5cycle (MCR10 / 18 / 25 / 50 / 100)		
Damp heat, steady state	± (3.0%+0.1Ω)	Max. 100mΩ	40°C, 93%RH (Relative Humidity) Test time: 1,000h to 1,048h		
Endurance at 70°C	± (3.0%+0.1Ω)	Max. 100mΩ	70°C Rated voltage (current) 1.5h: ON – 0.5h: OFF Test time: 1,000h to 1,048h		
Endurance	± (3.0%+0.1Ω)	Max. 100mΩ	125°C (MCR006 / 25 / 50 / 100) 155°C (MCR01 / 03 / 10 / 18) Test time : 1,000h to 1,048h		
Resistance to solvent	± (1.0%+0.05Ω)	Max. 50mΩ	23±5°C, Immersion cleaning, 5±0.5min Solvent : 2–propanol		
Bend strength of the end face plating	\pm (1.0%+0.05 Ω) Without mechanical data	Max. 50mΩ amage such as breaks.	-		


Compliance Standard(s): IEC60115-8 JISC 5201-8

●Technical data

Parameter	Unit	MCR006 YZP	MCR01 MZP / PZPI	MCR03 EZP / MZP / PZPI	MCR10 EZP	MCR18 EZP	MCR25 JZH	MCR50 JZH	MCR100 JZH
Insulation resistance	МΩ	1000	1000	1000	1000	1000	1000	1000	1000
Weight	mg/pc	0.157	0.70	2.12	5.03	9.46	16.5	25.8	42.0

●Tape Dimensions


■ Paper Tape



						(Unit : mm)
Part No.	Type Code	W	F	Е	Ao	B ₀
MCR006	YZP	8.0±0.2	3.5±0.05	1.75±0.1	0.38±0.03	0.68±0.03
MCR01	MZP	8.0±0.3	3.5±0.05	1.75±0.1	0.7±0.1	1.2±0.1
MCR03	EZP	8.0±0.3	3.5±0.05	1.75±0.1	1.1±0.1	1.9±0.1
MCR10	EZP	8.0±0.3	3.5±0.05	1.75±0.1	1.65 ^{+0.2} _{-0.1}	2.4 ^{+0.2} _{-0.1}
MCR18	EZP	8.0±0.3	3.5±0.05	1.75±0.1	1.95 ^{+0.1} _{-0.05}	3.5 ^{+0.15} _{-0.05}


Part No.	Type Code	D0	Po	P1	P2	T2
MCR006	YZP	φ1.5 ^{+0.1} 0	4.0±0.1	2.0±0.05	2.0±0.05	Max 0.5
MCR01	MZP	φ1.5 ^{+0.1} 0	4.0±0.1	2.0±0.05	2.0±0.05	Max 1.1
MCR03	EZP	φ1.5 ^{+0.1} ₀	4.0±0.1	4.0±0.1	2.0±0.05	Max 1.1
MCR10	EZP	φ1.5 ^{+0.1} ₀	4.0±0.1	4.0±0.1	2.0±0.05	Max 1.1
MCR18	EZP	φ1.5 ^{+0.1} ₀	4.0±0.1	4.0±0.1	2.0±0.05	Max 1.1

■ Paper Tape (Narrow pitch taping)



						(Unit : mm)
Part No.	Type Code	W	F	Е	A0	B0
		8.0±0.3	3.5±0.05	1.75±0.1	1.1±0.1	1.9±0.1
MCR03	MZP	D0	Po	P1	P2	T2
		φ1.5 ^{+0.1} 0	4.0±0.1	2.0±0.5	2.0±0.05	Max 1.1


■ Embossed Tape



						(Unit : mm)
Part No.	Type Code	W	F	E	A0	B0
MCR25	JZH	8.0±0.3	3.5±0.05	1.75±0.1	3.0±0.1	3.5±0.1
MCR50	JZH	12±0.3	5.5±0.05	1.75±0.1	3.4±0.2	5.6±0.2
MCR100	JZH	12±0.3	5.5±0.05	1.75±0.1	3.5±0.2	6.7±0.2

Part No.	Type Code	D0	P0	P1	P2	T2
MCR25	JZH	φ1.5 ^{+0.1} ₀	4.0±0.1	4.0±0.1	2.0±0.05	Max 1.1
MCR50	JZH	φ1.5 ^{+0.1} 0	4.0±0.1	4.0±0.1	2.0±0.05	Max 1.1
MCR100	JZH	φ1.5 ^{+0.1} 0	4.0±0.1	4.0±0.1	2.0±0.05	Max 1.1

•Reel Dimensions

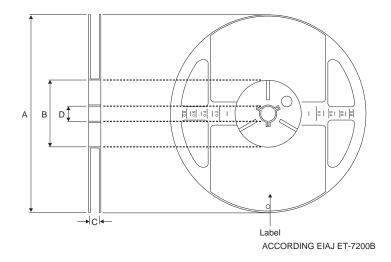


(Unit: mm)

Part No.	Type Code	А	В	С	D
MCR006	YZP				
MCR01	MZP	φ180 0 -1.5	φ60 ^{+1.0}	9 +1.0	φ13±0.2
MCR03	EZP MZP				
MCR10	EZP				
MCR18	EZP				
MCR25	JZH				
MCR50	JZH			13 ^{+1.0} 0	
MCR100	JZH				

Bulk case Dimensions

- MCR01PZPI
- **■** MCR03PZPI

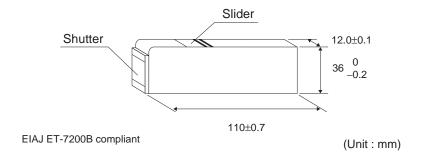

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/