
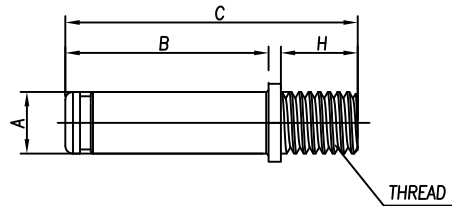


THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.

CUSTOMER DRAWING

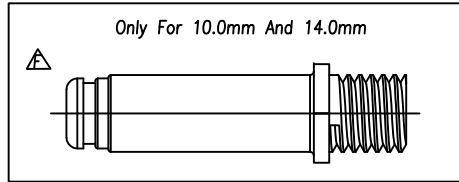





Ordering Example:

RadLok ——— RL 9
RadLok Pin ——— 080 — 101
RadLok Size: $\varnothing 8.0\text{mm}$
Surface Finish: Silver

Note:
Material: Copper Alloy.


Specification

Pin Size (mm)	A (mm)	B (mm)	C (mm)	H (mm)	S (mm)	Thickness (mm)	Thread	Torque Force (N.m)	Current(A)	Ordering Number (XXX-For Plating)	Plating
3.6	3.6	17.5	28.0	8	7.0	1.0~2.5	M4 X 0.7 - 6g	2.5±0.2	70	RL9036-XXX	101 Silver 102 Tin 103 Nickel
5.7	5.7	21.1	34.1	10	10.0	1.0~2.5	M6 X 1.0 - 6g	4.0±0.4	120	RL9057-XXX	
8.0	8.0	26.4	42.4	12	13.0	1.0~3.5	M8 X 1.25 - 6g	7.5±0.5	200	RL9080-XXX	
10.0	10.0	32.2	53.2	16	16.0	1.0~4.0	M10 X 1.5 - 6g	20±1	300	RL9100-XXX	
12.0	12.0	32.6	58.6	20	18.0	1.0~4.5	M12 X 1.75 - 6g	24±1	400	RL9120-XXX	
14.0	14.0	41.0	72.0	23	24.0	1.0~4.5	M12 X 1.75 - 6g	24±1	500	RL9140-XXX	

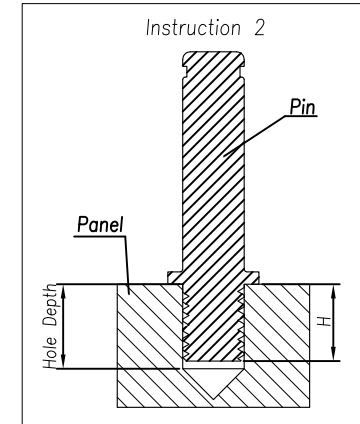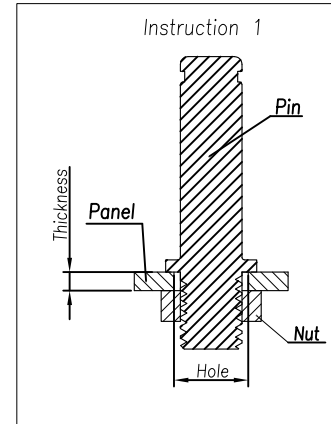

REVISIONS

REV	DESCRIPTION	DATE	BY	APPR
A	INITIAL RELEASE	01/04/14	DH	EC
B	CHANGE THE STRUCTURE OF PIN	01/26/14	DH	EC
C	CHANGE THE STRUCTURE OF PIN	02/06/14	DH	EC
D	ADD TORQUE FORCE	03/19/14	DH	EC
E	ADD RadLok Pin 14.0	04/01/15	VF	EC
F	Add a view of 10.0 and 14.0	01/11/18	KW	JG
G	CHANGE THE STRUCTURE OF PIN 14.0	07/09/18	DL	JL



Amphenol Technical Products International GZ

第三角投影 THIRD ANGLE PROJECTION	页面 SHEET	幅面 SIZE	版次 REV.	比例 SCALE.	PART NAME: RadLok Pin
1 OF 2	A3	G			DWG NO: See Table
签名 SIGNATURE	日期 DATE	UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 0 PL DEC ±1.00 1 PL DEC ±0.50 2 PL DEC ±0.20			CUST PART #: N/A
制图 DRAWN	DL	07/09/2018			CUST REV. G
审核 CHECKED	YM	07/09/2018			
批准 APPROVAL	JL	07/09/2018			

CUSTOMER DRAWING

REVISIONS				
REV	DESCRIPTION	DATE	BY	APPR
A	INITIAL RELEASE	01/04/14	DH	EC
B	CHANGE THE STRUCTURE OF PIN	01/26/14	DH	EC
C	CHANGE THE STRUCTURE OF PIN	02/06/14	DH	EC
D	ADD TORQUE FORCE	03/19/14	DH	EC
E	ADD RadLok Pin 14.0	04/01/15	VF	EC
F	Add a view of 10.0 and 14.0	01/11/18	KW	JG
G	CHANGE THE STRUCTURE OF PIN 14.0	07/09/18	DL	JL

Plating Type	Size	Description	FG P/N
Silver	3.6mm	RL Pin RL9036-101	AC-CP000102
	5.7mm	RL Pin RL9057-101	AC-CP000104
	8.0mm	RL Pin RL9080-101	AC-CP000105
	10.0mm	RL Pin RL9100-101	AC-CP000107
	12.0mm	RL Pin RL9120-101	AC-CP000110
	14.0mm	RL Pin RL9140-101	AC-CP000111
Tin	3.6mm	RL Pin RL9036-102	AC-CP000178
	5.7mm	RL Pin RL9057-102	AC-CP000180
	8.0mm	RL Pin RL9080-102	AC-CP000181
	10.0mm	RL Pin RL9100-102	AC-CP000183
	12.0mm	RL Pin RL9120-102	AC-CP000186
	14.0mm	RL Pin RL9140-102	AC-CP000187
Nickel	3.6mm	RL Pin RL9036-103	AC-CP000151
	5.7mm	RL Pin RL9057-103	AC-CP000153
	8.0mm	RL Pin RL9080-103	AC-CP000154
	10.0mm	RL Pin RL9100-103	AC-CP000156
	12.0mm	RL Pin RL9120-103	AC-CP000159
	14.0mm	RL Pin RL9140-103	AC-CP000160

