



Alternate Action & Momentary Miniature Pushbutton Switches

### TYPICAL SWITCH ORDERING EXAMPLE

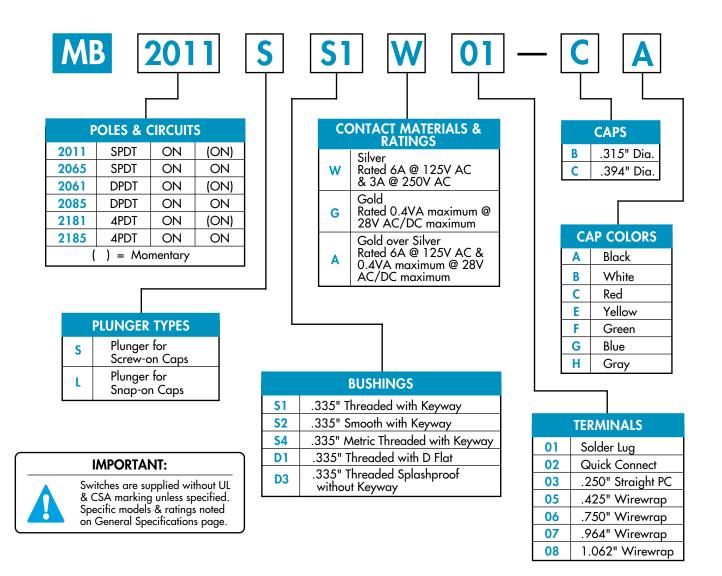

#### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE MB2011SS1W01-CA

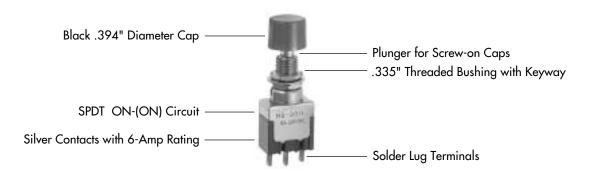



Alternate Action & Momentary Miniature Pushbutton Switches

### **GENERAL SPECIFICATIONS**

#### **Electrical Capacity (Resistive Load)**

Power Level (code W):	6A @ 125V AC & 3A @ 250V AC or 3A @ 30V DC
Logic Level (code G):	0.4VA maximum @ 28V AC/DC maximum
Logic/Power Level (code A):	Combines W & G ratings
Note: See Supplem	nent Index (page Z1) to find explanation of dual rating & operating range.

#### **Other Ratings**

Contact Resistance: Insulation Resistance:	10 milliohms maximum for silver; 20 milliohms maximum for gold 1,000 megohms minimum @ 500V DC			
Dielectric Strength:	1,000V AC minimum between contacts; 1,500V AC minimum between contacts & case			
Mechanical Life:	50,000 operations minimum for splashproof models; 100,000 for all other models			
Electrical Life:	25,000 operations minimum for silver at 100% power level; 50,000 operations minimum for silver at 50% power level; 50,000 operations minimum for gold			
Nominal Operating Force:	Momentary Action: 1-pole 950 grams; 2-pole 1,650 grams; 4-pole 2,400 grams; Alternate Action: 1-pole 450 grams; 2-pole 720 grams; 4-pole 1,200 grams			
Plunger Travel:	Screw-on Cap (Mom.)	Screw-on Cap (Alt.)	Snap-on Cap (Mom. & Alt.)	
Pretravel:	0.71 mm (.028")	2.80 mm (.110")	3.19 mm (.125")	
Overtravel:	1.09 mm (.043")	1.10 mm (.043")	1.26 mm (.050")	
Total Travel:	1.80mm (.071") 3.90 mm (.153") 4.45 mm (.175")			

#### **Materials & Finishes**

Plunger:	Brass with nickel plating
Bushing:	Brass with nickel plating
Frame:	Stainless steel
Case:	Diallyl phthalate resin
Movable Contactor:	Phosphor bronze with silver or gold plating
Movable Contacts:	Silver alloy (code W); copper with gold plating over nickel plating (code G); or
	silver alloy with gold plating over nickel plating (code A)
Stationary Contacts:	Silver with silver plating (code W); copper or brass with gold plating
	over nickel plating (code G); or silver with gold plating over nickel plating (code A)
Terminals:	Copper or brass with silver plating; copper or brass with gold plating over nickel plating

#### **Environmental Data**

Operating Temp Range: Humidity:	-30°C through +85°C (-22°F through +185°F) 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration:	10 ~ 55 Hz with peak-to-peak amplitude of 1.5 mm traversing the frequency range
The anon.	& returning in 1 minute; 3 right angled directions for 2 hours
Shock:	50g acceleration (tested in 6 right angled directions, with 5 shocks in each direction)
Sealing:	D3 bushing option equivalent to IP67

#### Installation

	15 kgf/cm (13 lb/in) for double nut; 7 kgf/cm (6 lb/in) for single nut 8.16 kg (18 lb) maximum downward force on actuator		
•	3 seconds @ 350°C or 5 seconds @ 270°C Not available		

#### **Standards & Certifications**

Flammability Standards:	
UL Recognized:	All models recognized at 6A @ 125V AC or 3A @ 250V AC or
	0.4A @ 28V DC; UL File No. E44145
CSA Certified:	All models certified at 6A @ 125V AC or 3A @ 250V AC or
	0.4VA @ 28V maximum; CSA File No. LR23535




Alternate Action & Momentary Miniature Pushbutton Switches

POLES & CIRCUITS						
	Plunger Position   ( ) = Momentary   Connected Termin		Terminals	Throw & Schematics		
		Normal	Down	Normal	Down	Nata Taminal and an
Pole	Model	,-Keyway		-Keyway		Note: Terminal numbers are not actually on the switch.
SP	MB2011	ON	(ON)	2-3	2-1	SPDT
Jr	MB2065	ON	ON	2-3	2-1	3 • • 1
	MB2061	ON	(ON)	0.0.5 /	01.54	DPDT 2 (COM) 5 
DP	MB2085	ON	ON	2-3 5-6	2-1 5-4	
	MB2181	ON	(ON)	2-3 5-6	2-1 5-4	4PDT
4P	MB2185	ON	ON	8-9 11-12	8-7 11-10	2 5 (COM) 8 11 3 • 1 6 • 4 9 • 7 12 • 10

### **PLUNGER TYPES**


On alternate action models, after transferring circuit, the plunger returns to its original position and does not latch down.

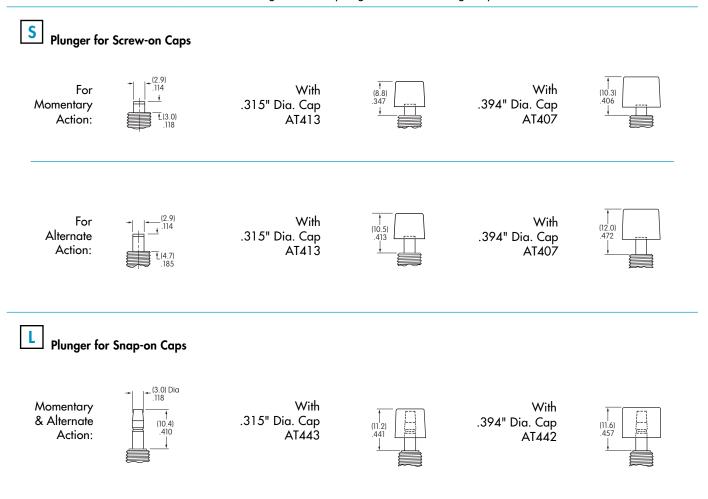



8-01

Alternate Action & Momentary Miniature Pushbutton Switches

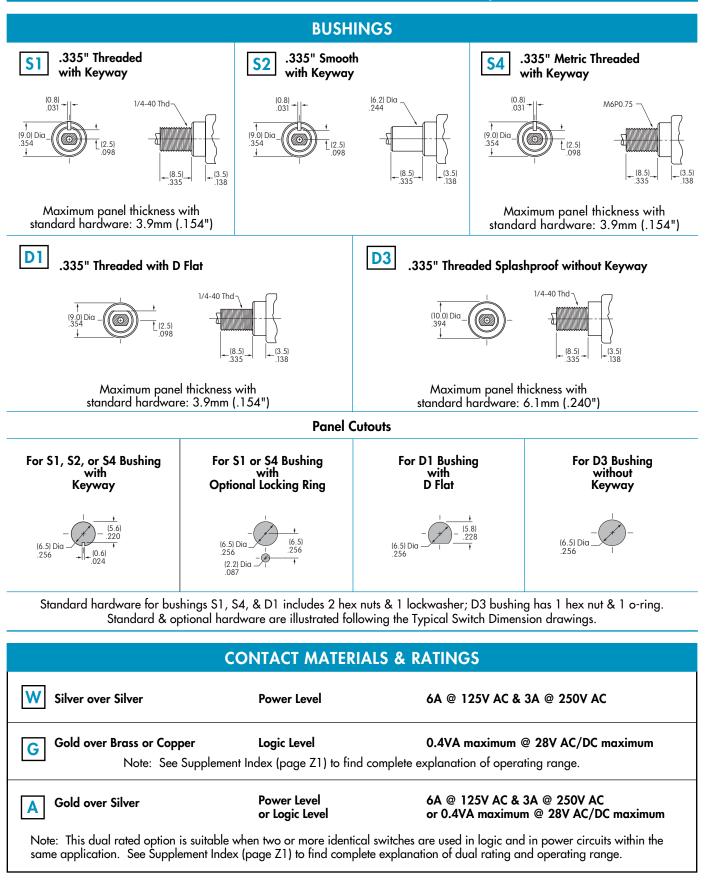



Alternate Action & Momentary Miniature Pushbutton Switches

**TERMINALS** .062" Wide 01 02 Solder Lug **Quick Connect** (4.0)(6.35) .250 Epoxy Seal -Epoxy Seal The .043" X .079" oblong hole ٨ ŧ L (2.0) .079 accommodates 1 solid 18-gauge (2.0)(1.57) .062 (1.1) wire or 2 solid or stranded Thk = (0.8) .031 Thk = (0.8) .031 20-gauge wires. 03 .250" Straight PC (4.7) Typ (4.7) Typ .185 18. (6.35) Epoxy Sea Ó (4.8) Õ 189 ŧ. (1.8) Dia Typ .073 Õ .8) Dia Typ + (1.17) .046 (1.8) Dia Typ 073 Thk = (0.8) 031 Double Pole Four Pole Single Pole .425" (10.8mm) 05 Wirewrap or Extended PC If using as extended PC terminal, refer to the above footprints. .750" (19.05mm) Epoxy Seal 06 Dimension A =terminal lengths as Wirewrap or Extended PC shown beside the terminal codes at .964" (24.5mm) 07 + (1.27) the left. Wirewrap or Extended PC Thk = (0.8) .031 1.062" (27.0mm) **08** Wirewrap or Extended PC **CAPS & CAP COLORS** AT413 AT443 AT442 AT407 С В .315" Diameter .394" Diameter .315" Diameter .394" Diameter Screw-on Cap **Snap-on Cap Snap-on Cap** Screw-on Cap For use with For use with For use with For use with Plunger Code S Plunger Code L Plunger Code L Plunger Code S Material: PBT Material: Polycarbonate Material: Polycarbonate Material: PBT Finish: Glossy Finish: Glossy Finish: Glossy Finish: Glossy (8.0) .315 6.5 (10.0) Dia (10.0) Dia (8.0) Dia (8.0) Dia .315 ~ M2 3 P0 4 M2.3 P0.4 **Cap Colors** Ε B С F G Н Α Yellow Available: White Red Green Blue Gray Clear Black




Alternate Action & Momentary Miniature Pushbutton Switches


### **TYPICAL SWITCH DIMENSIONS**


Solder Lug

Single Pole





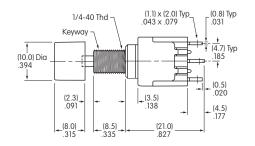





MB2011SS1W01-CA


Solder Lug

Double Pole





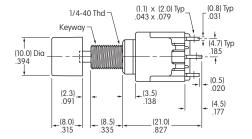





#### MB2061SS1W01-CA


Solder Lug

Four Pole





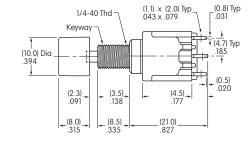




MB2181SS1W01-CA



Alternate Action & Momentary Miniature Pushbutton Switches

#### HARDWARE

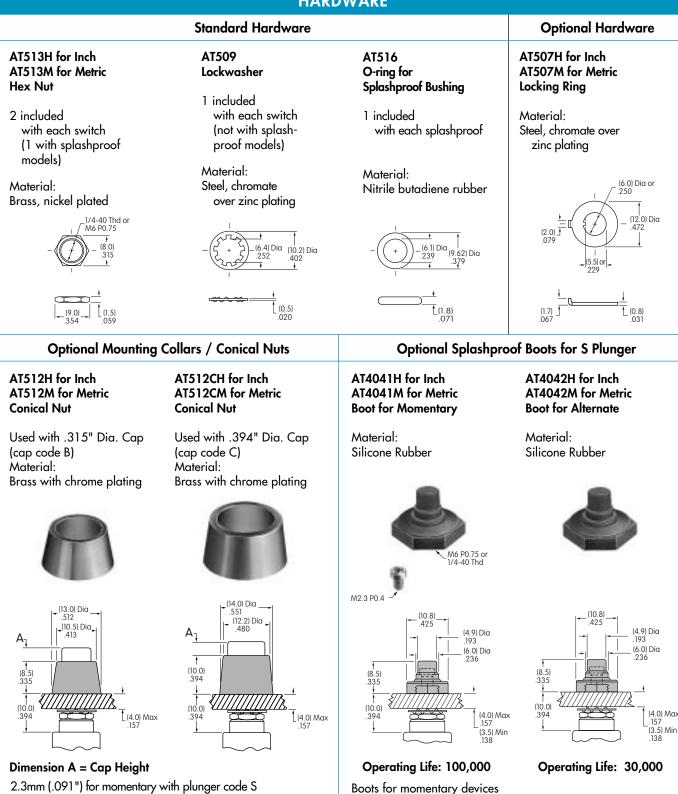

are accompanied by a threaded adaptor which extends the

length of the plunger.

- 4.0mm (.157") for alternate with plunger code S
- 3.6mm (.142") for momentary & alternate with plunger code L

