


Data Sheet | Item Number: 787-1632

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact

<https://www.wago.com/787-1632>

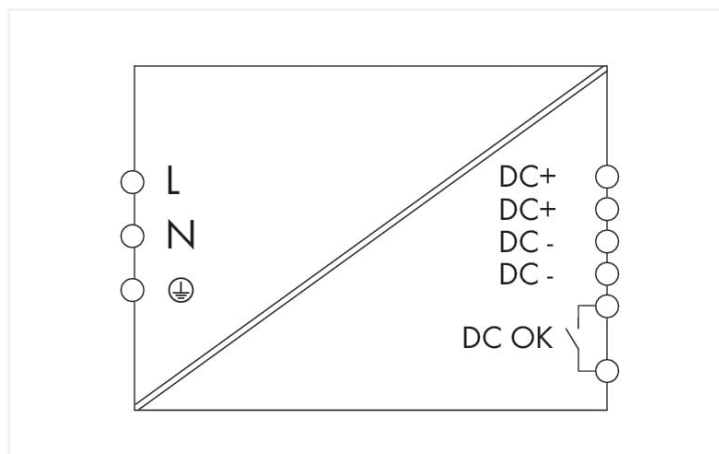

Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- DC OK contact
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204
- GL approval

Technical data

Input

Phases	1
Nominal input voltage $U_{i, \text{nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 85 ... 264 V; DC 100 ... 300 V
Input voltage derating	-2.5 %/V (< 100 VAC); -1 %/V (< 130 VDC)
Nominal mains frequency range	44 ... 66 Hz; 0 Hz
Input current I_i	$\leq 1.25 \text{ A}$ (230 VAC); $\leq 2.74 \text{ A}$ (100 VAC)
Discharge current	$\leq 1 \text{ mA}$
Inrush current	$\leq 30 \text{ A}$
Power factor correction (PFC)	Active
Mains failure hold-up time	$\geq 17 \text{ ms}$ (230 VAC); $\geq 15 \text{ ms}$ (100 VAC)

Output

Nominal output voltage $U_{o, \text{nom}}$	DC 24 V (SELV)
Output voltage range	DC 23 ... 28.5 V (adjustable)
Default setting	DC 24 V
Nominal output current $I_{o, \text{nom}}$	10 A (24 VDC)
Nominal output power	240 W
Deviation	$\leq 1 \%$
Residual ripple	$\leq 50 \text{ mV}$ (peak-to-peak)
Current limitation	$1.1 \times I_{o, \text{nom}}$ (typ.)
Overload behavior	Constant current

Signaling and communication

Signaling	1 x LED DC OK (green) 1 x DC OK contact (make contact; max. 30 VAC/DC; 1 A)
Operation status indicator	Green LED (U_o)

Efficiency/power losses

Power loss P_i	$\leq 6.6 \text{ W}$; $\leq 24.4 \text{ W}$ (230 VAC; nominal load)
Power loss (max.) $P_{i(\text{max})}$	31.3 W (100 VAC / 24 VDC; 10 A)
Efficiency (typ.)	91 %

Circuit protection

Internal fuse	T 6.3 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C

Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ DC 35 V
Oversvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Oversvoltage protection; secondary	Internal protective circuit ≤ 40 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type 1	Input/output/signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 721 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	55 mm / 2.165 inches
Height	127 mm / 5 inches
Depth from upper-edge of DIN-rail	172 mm / 6.772 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	0 MJ
Weight	1140 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-5 %/K (> 60 °C, 196... 264 VAC); -2.5 %/K (> 50 °C, 85 ... 195 VAC)
Climatic category	3K3 (per EN 60721)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 60950-1 UL 508 DNV SEMI F47

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143060516
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02. B.00089_19
UL Underwriters Laboratories Inc.	UL 508	E255817
UL Underwriters Laboratories Inc.	UL 60950-1	E255815

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
MFD with product refe- rence WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV Germany GmbH	DNVGL-CG-339, Dec. 2019	TAA00002YC

Downloads

Environmental Product Compliance



Compliance Search

Environmental Product Compliance 787-1632



Documentation

Bid Text

787-1632	04.07.2019	xml 7.26 KB	
787-1632	04.06.2019	docx 20.88 KB	

Instruction Leaflet


Primär getaktete Stromversorgungen CLASSIC	pdf 251.28 KB	
--	------------------	---

CAD/CAE-Data

CAD data

2D/3D Models 787-1632	
-----------------------	---

CAE data

EPLAN Data Portal 787-1632	
WSCAD Universe 787-1632	
ZUKEN Portal 787-1632	

Engineering-Software

Configuration and Commissioning Software

WAGO Line Length Calculation	1.3.5 09.12.2019	exe 329.50 KB	
------------------------------	---------------------	------------------	---

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com