



Photocoupler

Product Data Sheet

LTV-733

(M, S, S-TA, S-TA1) series

Spec No.: DS-70-99-0008

Effective Date: 07/27/2016

Revision: C

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

LITE-ON Technology Corp. / Optoelectronics

No.90,Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C.

Tel: 886-2-2222-6181 Fax: 886-2-2221-1948 / 886-2-2221-0660

<http://www.liteon.com/opto>

Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

1. DESCRIPTION

1.1 Features

- Current transfer ratio (CTR : MIN. 20% at $I_F = \pm 1\text{mA}$, $V_{CE} = 5\text{V}$, $T_A = 25^\circ\text{C}$)
- High input-output isolation voltage $V_{iso} = 5,000\text{Vrms}$
- Response time (t_r : TYP. $4\mu\text{s}$ at $V_{CE} = 2\text{V}$, $I_C = 2\text{mA}$, $R_L = 100\Omega$)
- Dual-in-line package :
LTV-733
- Wide lead spacing package :
LTV-733M
- Surface mounting package :
LTV-733S
- Tape and reel packaging :
LTV-733S-TA, LTV-733S-TA1
- Safety approval
UL 1577
VDE DIN EN60747-5-5 (VDE 0884-5)
CSA CA5A
Nordic Safety (FIMKO)
CQC GB4943.1-2011/GB8898-2011 (meet Altitude up to 5000m)
- RoHS Compliance
All materials be used in device are followed EU RoHS directive (No.2002/95/EC).
- ESD pass HBM 8000V/MM2000V
- MSL class1


1.2 Applications

- Directly connectable to TTL
- AC input response


Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

2. PACKAGE DIMENSIONS


2.1 LTV-733

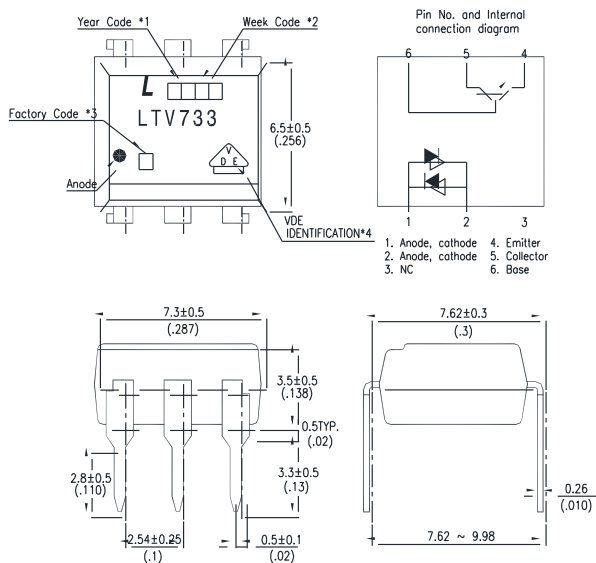

2.2 LTV-733M

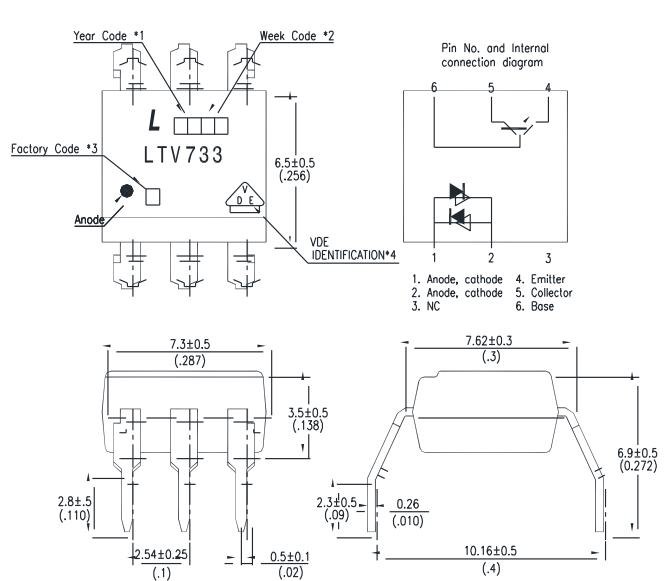

2.3 LTV-733S

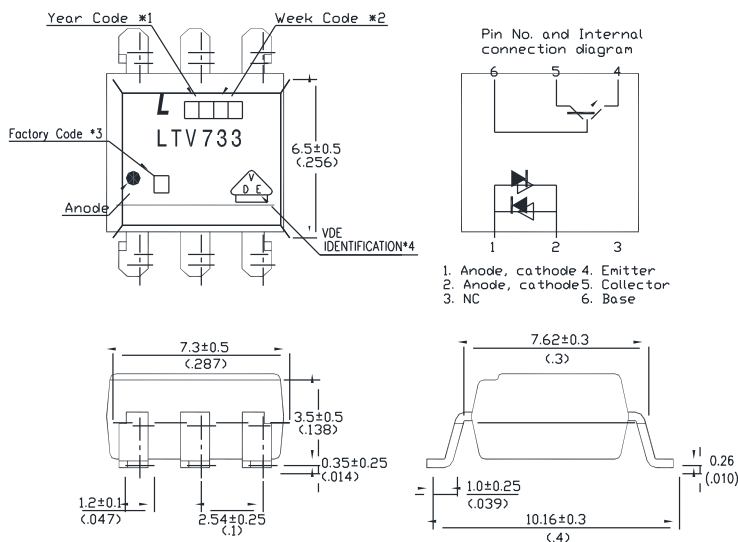

Notes :


1. Year date code.
2. 2-digit work week.
3. Factory identification mark shall be marked (Y: Thailand, W: China-CZ).
4. For VDE option.

Dimensions in millimeters (inches)


Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

3. TAPING DIMENSIONS

3.1 LTV-733S-TA

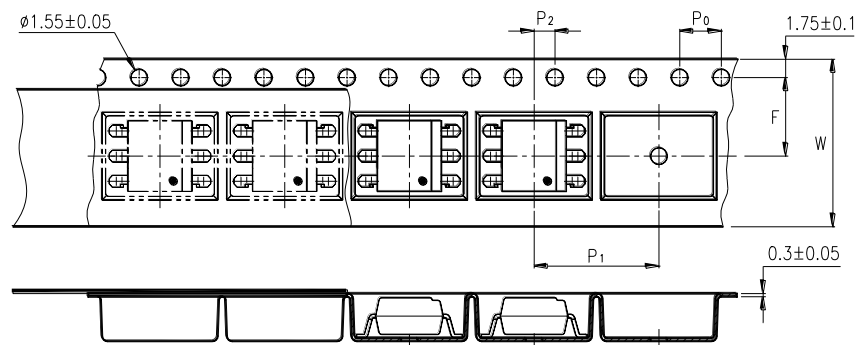

3.2 LTV-733S-TA1

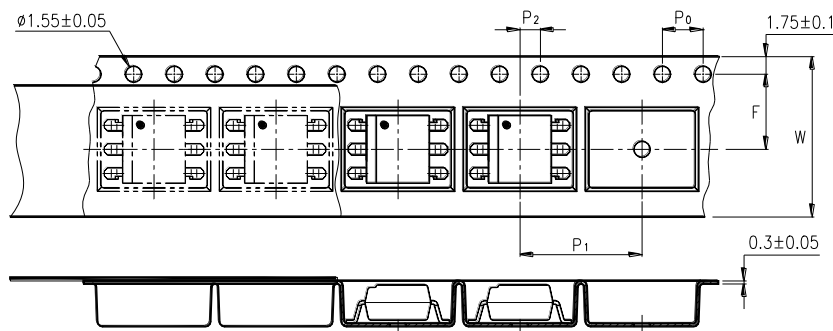

Description	Symbol	Dimension in mm (inch)
Tape wide	W	16 $\pm$ 0.3 (0.63)
Pitch of sprocket holes	P ₀	4 $\pm$ 0.1 (0.15)
Distance of compartment	F	7.5 $\pm$ 0.1 (0.295)
	P ₂	2 $\pm$ 0.1 (0.079)
Distance of compartment to compartment	P ₁	12 $\pm$ 0.1 (0.472)

3.3 Quantities Per Reel

Package Type	TA / TA1
Quantities (pcs)	1000

Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

4. RATING AND CHARACTERISTICS

4.1 Absolute Maximum Ratings at Ta=25°C

	Parameter	Symbol	Rating	Unit
Input	Forward Current	I_F	± 50	mA
	Power Dissipation	P	70	mW
	Junction Temperature	T_J	125	°C
Output	Collector - Emitter Voltage	V_{CEO}	35	V
	Emitter - Collector Voltage	V_{ECO}	6	V
	Collector - Base Voltage	V_{CBO}	35	V
	Emitter - Base Voltage	V_{EBO}	6	V
	Collector Current	I_C	50	mA
	Collector Power Dissipation	P_C	150	mW
Total Power Dissipation		P_{tot}	200	mW
*1 Isolation Voltage		V_{iso}	5000	V_{rms}
Operating Temperature		T_{opr}	-30 ~ +100	°C
Storage Temperature		T_{stg}	-55 ~ +125	°C
*2 Soldering Temperature		T_{sol}	260	°C

*1. AC For 1 Minute, R.H. = 40 ~ 60%

Isolation voltage shall be measured using the following method.

(1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.

(2) The isolation voltage tester with zero-cross circuit shall be used.

(3) The waveform of applied voltage shall be a sine wave.

*2. For 10 Seconds

Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

4.2 ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
INPUT	Forward Voltage	V_F	—	1.2	1.4	V	$I_F = \pm 20\text{mA}$
	Terminal Capacitance	C_t	—	50	250	pF	$V = 0, f = 1\text{KHz}$
OUTPUT	Collector Dark Current	I_{CEO}	—	—	100	nA	$V_{CE} = 20\text{V}, I_F = 0$
	Collector-Emitter Breakdown Voltage	BV_{CEO}	35	—	—	V	$I_C = 0.1\text{mA}$ $I_F = 0$
	Emitter-Collector Breakdown Voltage	BV_{ECO}	6	—	—	V	$I_E = 10\mu\text{A}$ $I_F = 0$
TRANSFER CHARACTERISTICS	Collector Current	I_C	0.2	—	3	mA	$I_F = \pm 1\text{mA}, V_{CE} = 5\text{V}$
	*Current Transfer Ratio	CTR	20	—	300	%	
	Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	0.2	V	$I_F = \pm 20\text{mA}$ $I_C = 1\text{mA}$
	Isolation Resistance	R_{iso}	5×10^{10}	1×10^{11}	—	Ω	DC500V 40 ~ 60% R.H.
	Floating Capacitance	C_f	—	0.6	1	pF	$V = 0, f = 1\text{MHz}$
	Cut-Off Frequency	f_c	15	80	—	kHz	$V_{CE} = 5\text{V}, I_C = 2\text{mA}$ $R_L = 100\Omega, -3\text{dB}$
	Response Time (Rise)	t_r	—	4	18	μs	$V_{CE} = 2\text{V}, I_C = 2\text{mA}$ $R_L = 100\Omega$
	Response Time (Fall)	t_f	—	3	18	μs	

$$*CTR = \frac{I_C}{I_F} \times 100\%$$

Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

5. CHARACTERISTICS CURVES

Fig.1 Forward Current vs.
Ambient Temperature

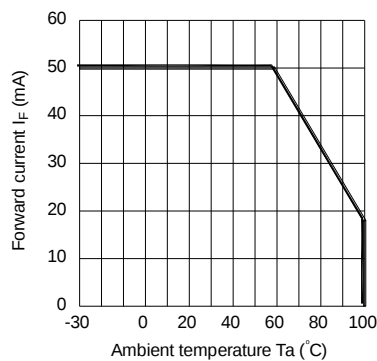


Fig.2 Collector Power Dissipation vs.
Ambient Temperature

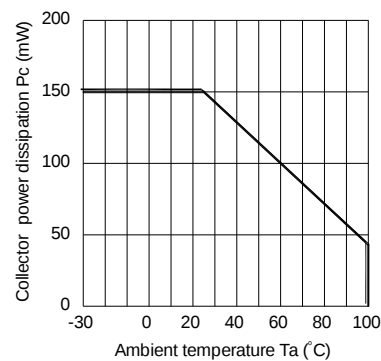


Fig.3 Collector-emitter saturation
Voltage vs. Forward current

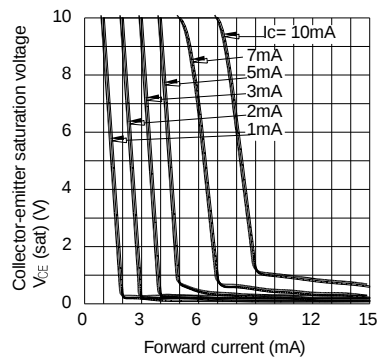


Fig.4 Forward Current vs. Forward
Voltage

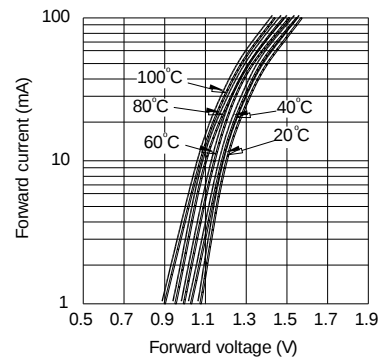


Fig.5 Current Transfer Ratio vs. Forward
Current


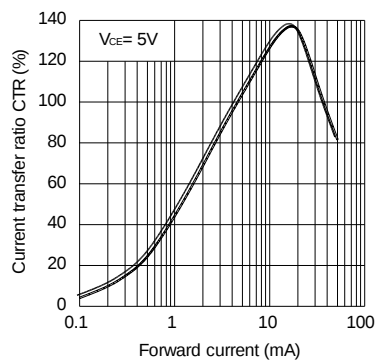


Fig.6 Collector Current vs.
Collector-emitter Voltage

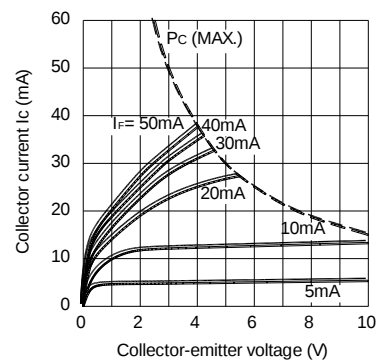

Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

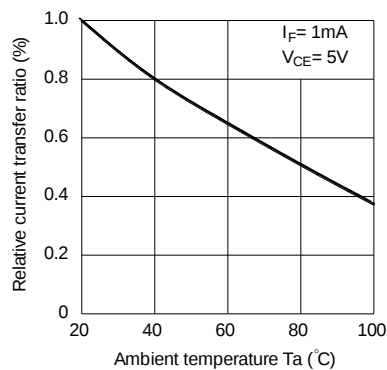


Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature

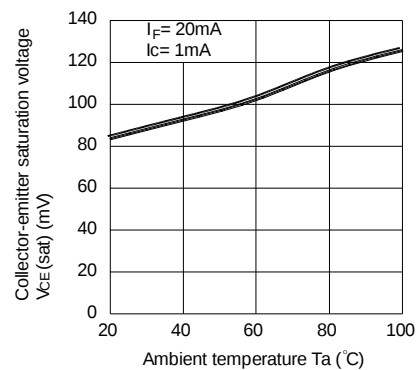


Fig.9 Collector Dark Current vs. Temperature

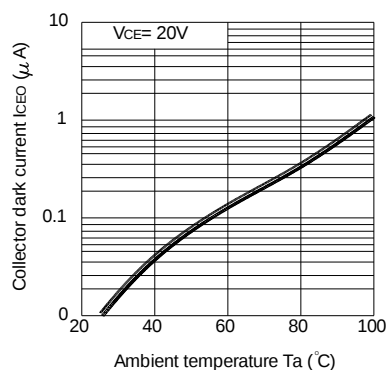


Fig.10 ICBO vs. Temperature

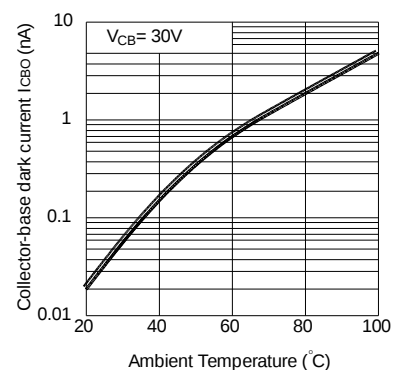


Fig.11 Response Time vs. Load Resistance


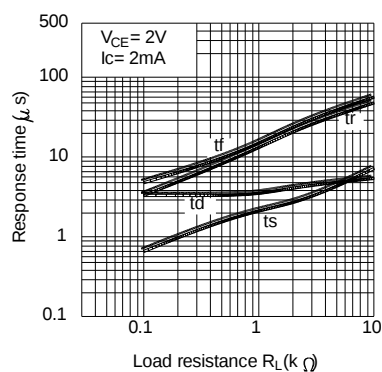


Fig.12 Frequency Response

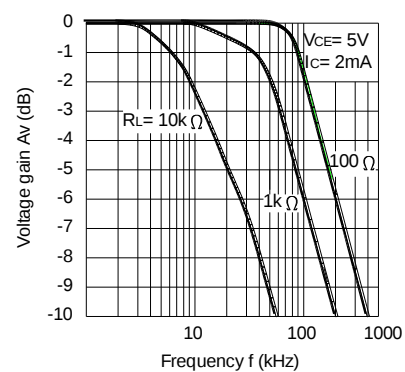


Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

6. TEMPERATURE PROFILE OF SOLDERING

6.1 IR Reflow soldering (JEDEC-STD-020C compliant)

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than three times.

Profile item	Conditions
Preheat	
- Temperature Min (T_{Smin})	150°C
- Temperature Max (T_{Smax})	200°C
- Time (min to max) (t_s)	90±30 sec
Soldering zone	
- Temperature (T_L)	217°C
- Time (t_L)	60 sec
Peak Temperature (T_P)	260°C
Ramp-up rate	3°C / sec max.
Ramp-down rate	3~6°C / sec

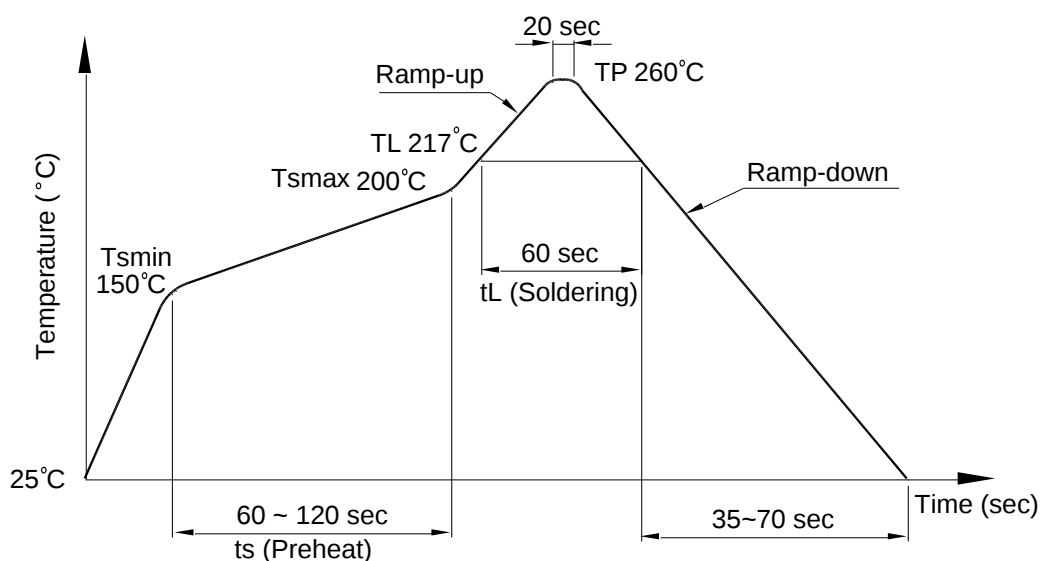

Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

6.2 Wave soldering (JEDEC22A111 compliant)


One time soldering is recommended within the condition of temperature.

Temperature: $260 \pm 0/-5^{\circ}\text{C}$

Time: 10 sec.

Preheat temperature: 25 to 140°C

Preheat time: 30 to 80 sec.

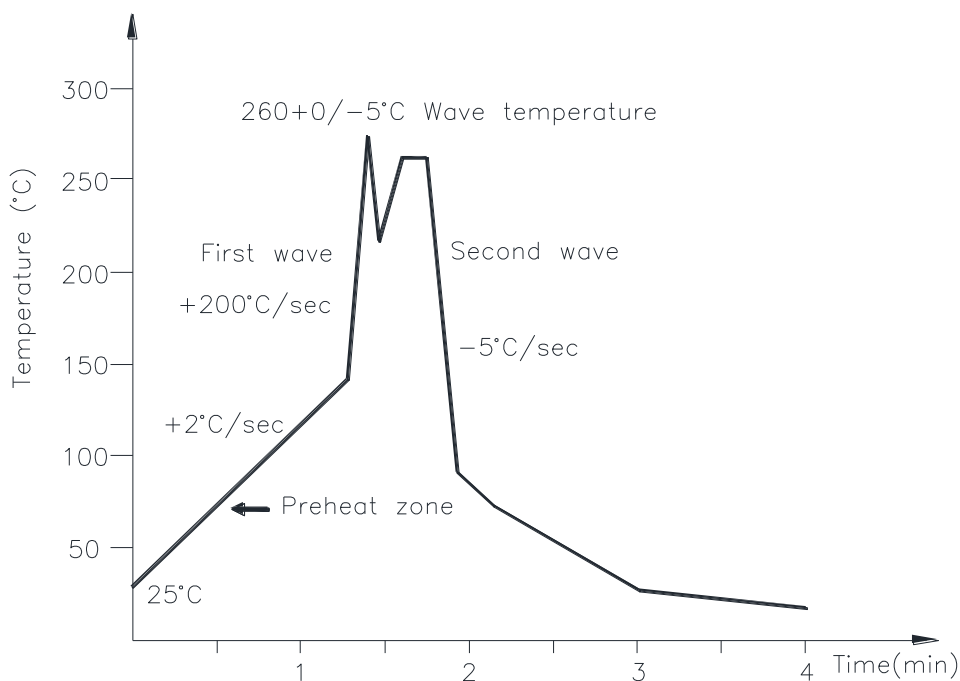

6.3 Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.


Temperature: $380 \pm 0/-5^{\circ}\text{C}$

Time: 3 sec max.

Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

7. RECOMMENDED FOOT PRINT PATTERNS (MOUNT PAD)

Unit: mm

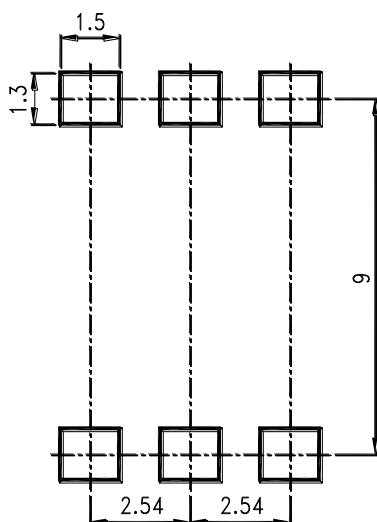

Photocoupler LTV-733 (M, S, S-TA, S-TA1) series

8. NAMING RULE

LTV-733(1)-(2)

DEVICE PART NUMBER

- (1) No suffix = Dual-in-Line package
M = Wide lead spacing package
S = Surface mounting package

(2) TAPING TYPE (TA, TA1)

Please refer to orientation of taping on Page: 3

Example : LTV-733S-TA1

LTV733(1)(2)-V

DEVICE PART NUMBER

- (1) No suffix = Dual-in-Line package
M = Wide lead spacing package
S = Surface mounting package

(2) TAPING TYPE (TA, TA1)

Please refer to orientation of taping on Page: 3

(4) VDE order option

Example : LTV733STA1-V

9. NOTES

- LiteOn is continually improving the quality, reliability, function or design and LiteOn reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
- When requiring a device for any "specific" application, please contact our sales in advice.
- If there are any questions about the contents of this publication, please contact us at your convenience.
- The contents described herein are subject to change without prior notice.
- Immerge unit's body in solder paste is not recommended.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lite-On:

[LTV-733M](#) [LTV-733S-TA](#) [LTV-733S](#) [LTV-733S-TA1](#) [LTV-733](#)