




PRODUCT NUMBER: 5058-0-57-80-00-00-03-0

www.mill-max.com  
DATA SHEET

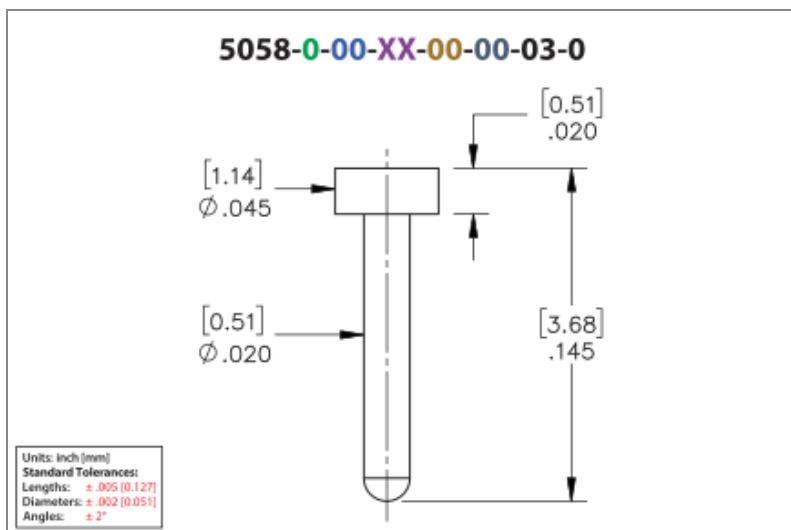

## 5058-0-57-80-00-00-03-0 SPECIFICATIONS


| General Info                     |                           | Materials   | Technical Specs  |
|----------------------------------|---------------------------|---|--|
| Description <sup>1</sup> :       | Nail Head Pin             | Shell Material <sup>5</sup> : Brass Alloy                                     | Operating Temperature Range <sup>7</sup> : -55/+125° C |
| Mounting Feature <sup>2</sup> :  | Through-Hole Solder Mount | Shell Plating <sup>6</sup> : 200 - 300 $\mu$ " Tin (matte finish) over Nickel | Maximum Current: Application Specific                  |
| Mounting Hole:                   | .024" (0,610mm)           |   |  |
| Alternate Mounting Hole:         | N/A                       |   |  |
| Packaging:                       | Vertically on Tape & Reel |   |  |
| RoHS <sup>3</sup> :              | Yes                       |   |  |
| Product Lifecycle <sup>4</sup> : | Active                    |   |  |
| Country Of Origin:               | USA                       |   |  |

## NOTES:

1. Standard Tolerances:  
Lengths  $+\/- .005$ " (0,13)  
Diameters:  $+\/- .002$ " (0,051)  
Angles:  $+\/- 2^\circ$
2. For through-hole solder mounting of this part, the suggestion is to make the finished hole size, at its minimum,  $.004$ " larger than the diameter being soldered into the mounting hole.
3. Mill-Max products labeled with the RoHS symbol are compliant with all three ROHS Directives. All of our products previously described as RoHS (2002/95/EC) and RoHS-2 (2011/65/EC) are also compliant with RoHS-3 (2015/863/EU).
4. Part is Active and in Production, No Scheduled Obsolescence
5. Brass Alloy 360 per ASTM B 16, or 385 per ASTM B455
6. TIN (100%) per ASTM B 545, Matte finish (With whisker and oxide inhibitors); NICKEL per ASTM B 689, Type 2 (Bright)
7. Per IEC 60512-11-(4,-9,-10,-12)

## ADDITIONAL PARTS, PACKAGING, & ASSEMBLY INFO

### 5058-0-57 Tape & Reel Details

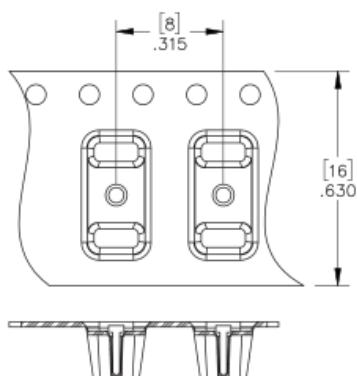

## ADDITIONAL NOTES AND SPECIFICATIONS

In the interest of improved design, quality and performance , Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

## RELATED LINKS AND DOCUMENTS

- Engineering Notebook: [Introduction to Printed Circuit Board PCB Pins](#)
- Environmental Compliance: <https://www.mill-max.com/rohs>